
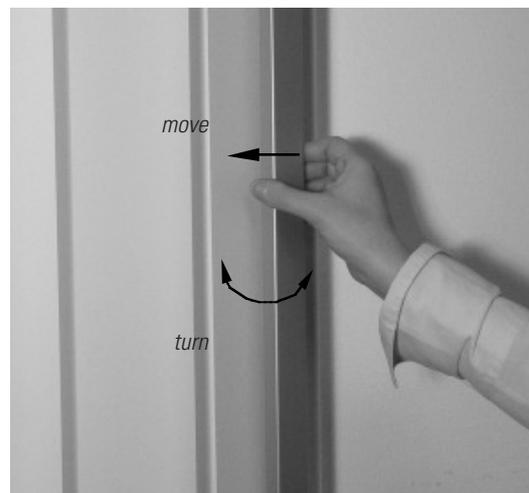
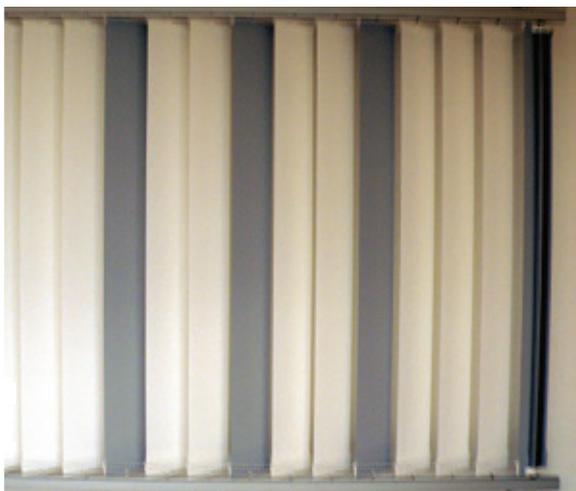


OPERATING INSTRUCTIONS VERTICAL BLIND SYSTEM STAR ZUG, FUTURE AND PALMA

Turn of vertical slats with lateral operating chain.
 Moving of vertical slats with lateral operating cord.
 Before moving the slats, turn them across the rail.

**OPERATING INSTRUCTIONS VERTICAL BLIND SYSTEM SUNGLICE**

Before moving the slats, turn them at a 90° angle to the rail.
 For an even turn of the slats, move operating bar to ultimate stop position in order to tension the distance chains.

CLEANING RECOMMENDATION FOR LOUVRES**FOR ALL WASHABLE QUALITIES (HAND WASHING)**

Loose the distance chains upwards from the bottom weights and remove the bottom weights. Take the louvers at the slat holder out of the hooks. On removing the louvers please pay attention that the slats do not get any creases or tender spots.

The slats should be rolled up lightly and straightly and put into a tank with soap suds, lying on the cutting edges. Appr. 10 to 30 slats can be put into one tank, with exception of the Alustar qualities. For those please take one tank per slat. Please pay attention that the tank you take is big enough to guarantee that the cutting edges are completely covered with water.

Water temperature max. 25 – 30°C. For Alustar Qualities up to 22°C.

For appr. 10 to 15 l water you need 40 ml liquid gentle washing agent, but regard absolutely that the agent you take is without any bleaching agents and whitener according to product information.

The slats should be soaked in the soap suds 15 to 60 minutes, only louvers made of cotton and linen should not lie more than 20 minutes in the water. By moving the slats in the soap suds from time to time you can reach a better washing result, but this is also not recommendable for the Alustar qualities.

**IRON GUIDANCE**

For louvers of all qualities which can be ironed (as per collection card) lay the single louvers lengthwise on the ironing board which must be covered with cotton or linen.

Please iron along the edge of the slats with a steam iron. Choose the minimum heat with minimum steam. Put the steam control on maximum position and observe that the water tank is always more than half-full.

Afterwards please lay one slat exactly on top of the other and let them cool down at least 1 hour before hanging them up resp. rolling them up along the edges.

MAINTENANCE

sundrapé®-vertical blinds are maintenance-free.