ORDER FORM

Panel curtain

sundrape

CUSTOMER

| Customer/Client-No. |
| Phone |
| Fax |
| Person in charge |
| Commission |

RECEIVER'S ADDRESS

| Messrs. |
| Address |
| Postal code   Area |
| for the attn. of |
| Delivery date |

DISPATCH

☐ UPS

☐ Truck

☐ Pick up

Others

OFFER-NO.

Please indicate, if an offer has been submitted.

Stamp

Date   Signature

ORDER sundrape® panel systems are being made to measure and cannot be returned nor exchanged.

all sizes in mm
** for type 9050/9051/9052 panel height

☐ Repeat! (If the fax has not been sent due to an error message)

Pos.	Customer pos.	Pcs.	Type no. (1)	Width of blind	Height of blind panel height *	Quantity panel runner	Width panel runner (2)	Bottom bar (3) internal external	Profile (4) white silver	Arrangement(5) panels	Drapery quality	Stack le ce ri	Operation left right	Operation length (6)	Preis
			9 0					☐ ☐	☐ ☐	/		☐ ☐ ☐	☐ ☐		
			9 0					☐ ☐	☐ ☐	/		☐ ☐ ☐	☐ ☐		
			9 0					☐ ☐	☐ ☐	/		☐ ☐ ☐	☐ ☐		
			9 0					☐ ☐	☐ ☐	/		☐ ☐ ☐	☐ ☐		
			9 0					☐ ☐	☐ ☐	/		☐ ☐ ☐	☐ ☐		

(1) Types

	movable	cord pull	rod control	electric
2 tracks	9042	9062	9072	9082
3 tracks	9043	9063	9073	9083
4 tracks	9044	9064	9074	9084
5 tracks	9045	9065	9075	9085

(1) Types

Panel runner	9055 without bottom bar
Panel runner-set	9056 internal bottom bar
Panel runner-set	9057 external bottom bar
drive runner for movable roller blind	9058 rod operation
drive runner for movable roller blind	9059 cord operation
Drapery	9050 internal bottom bar
Drapery	9051 external bottom bar
Drapery	9052 without bottom bar, with hem

(2) Measurements for calculation see back side

(3) bottom bar
inserted into seam or external with end caps
(4) profile colour:
matt white 9016 or silver 9006,
special colours or anodizing on request
**(5) type number** or sketch: examples pls. see overleaf
(6) operation length
standard cord length = 0,8 x heigth of blind
(round up to 100 mm)
heigth of blind up to 2000 mm rod length 1000 mm
heigth of blind up to 2000 mm rod length 1500 mm
heigth of blind up to 3000 mm rod length 2000 mm

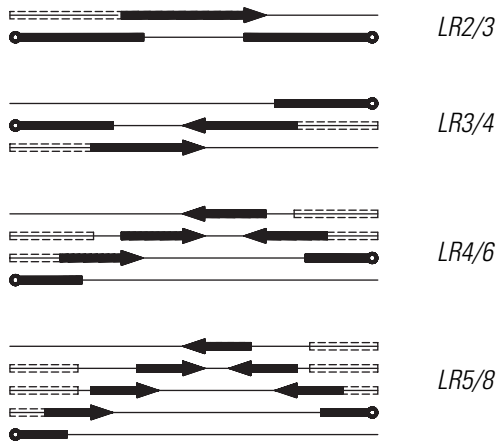**Mounting accessories to be ordered separatly, see pricelist**

	art. no.	for pos.
☐ rail clip white, 2-track	P59 111	
☐ rail clip white, 3/4/5-track	P59 112	
☐ mounting angle white with clip 2 track	P32 011	
☐ mounting angle white with clip 3/4/5 track	P32 012	
☐ locking bolt, rail 2 track	P31 010	
☐ locking bolt, rail 3/4/5 track	P31 011	
☐ mounting angle white with locking bolt 2tr.	P32 021	
☐ mounting angle white, locking bolt 3/4/5tr.	P32 022	
☐ magnetic operation button	P59 030	

595 60E • 08.2010

Examples for panel runner order/type numbers

Operation by cord

L2/2

L3/3

L4/4

L5/5
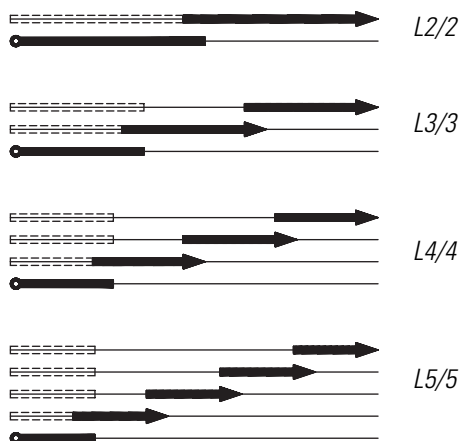
Operation by rod or cord, 2 parts, symmetric order

LR2/3

LR3/4

LR4/6

LR5/8

Operation by rod, 2 parts, asymmetric order

LR3/5

LR4/7

LR5/9
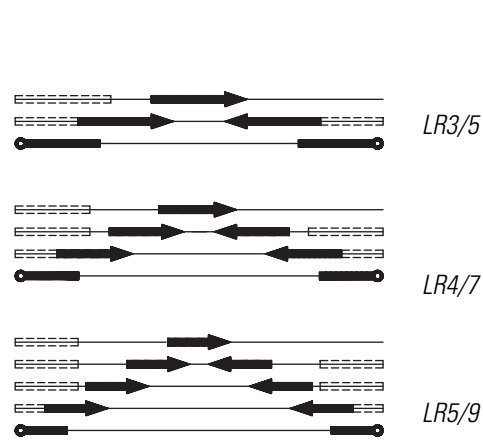
Operation by rod or cord, centre, symmetric order

M3/3

M5/5

○━━ unmovable panel

━━▶ movable panel

┈┈┈┈ curtain opened / stack
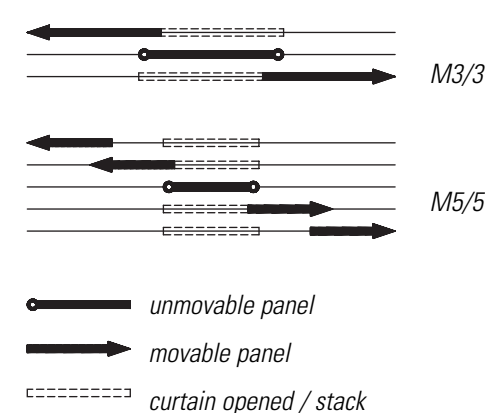
One part blinds are shown with stack at the left. The type number for ones with stack at the right must read e. g. R4/4.

Type numbers
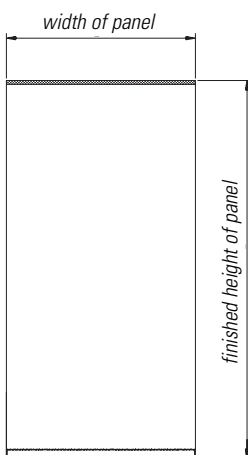|	
stack:	L / R / M
number of tracks:	2 / 3 / 4 / 5
number of panels:	2 - 10

For other types a sketch is required.

Advice for measuring
For mounting in niche, we recommend to reduce the finished width by 30 mm and the finished height by 20 mm.

Type 9050/9051/9052 (drapery)

width of panel

finished height of panel

*Ready made panel drapery:
Finished height from top hem with velcro to bottom hem or bottom bar.*

(2) **Calculation of panel runner's width:**
minimum overlapping 50 mm (standard)

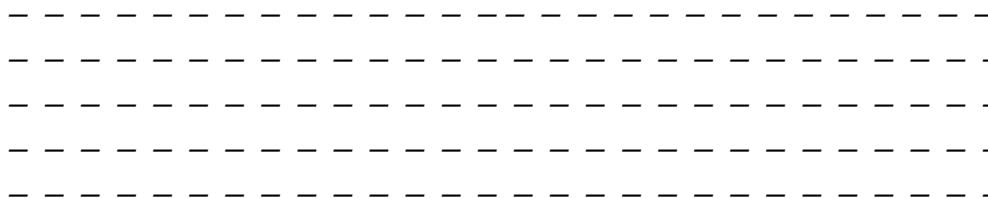Panel runner width: $\dfrac{\text{width of blind - 54 mm}}{\text{number of panel runners}} + 50\ mm$

e.g. width of blind 4500 mm, 6 panels

$= \dfrac{4500\ mm - 54\ mm}{6\ panel\ runners} + 50\ mm = 791\ mm$

mounting clip *dictance max. 1000 mm, evenly distributed*

Sketch panel order

Pos.:

Measuring advices for corner construction

*rail length 1
= clear width 1 – 160 mm – X
rail length 2
= clear width 2 – 160 mm – X
distance of rail towards wall X
mutable*