

Order form

Roller blind system

CUSTOMER

Customer/Client No. _____

Phone _____

Fax _____

Person in charge _____

Commission _____

RECEIVER'S ADDRESS

Messrs. _____

Address _____

Postal code _____ Area _____

for the attn. of _____

Delivery date _____

DISPATCH

UPS

Truck

Pick up

Others _____

OFFER-NO.

Please indicate, if an offer has been submitted.

Stamp _____

Date _____ Signature _____

ORDER *sundrapé® Quadro roller blinds are being made to measure and cannot be returned nor exchanged.*

Repeat! (If the fax has not been sent due to an error message)

Pos.	Customer pos.	Pcs.	Type no.	Roller blind width	Roller blind height	Colour (1) aluminium parts	Plastic parts		Drapery quality	Operating height (2)	Operation		Price
							black	white			left	right	
			L				<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	
			L				<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	
			L				<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	
			L				<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	
			L				<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	
			L				<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	

Special operating elements side pull drive (3)

stainless steel chain

Cable exit electric roller blind

at the top

behind

Electric accessories see price list

pcs. art. no.

Mounting roller blind with head box


number of clip supports:
 roller width up to 1000 mm: 2 clip supports
 roller width up to 2000 mm: 3 clip supports
 roller width up to 2500 mm: 4 clip supports (inclusive)

Advices:

- (1) silver 9006 or white 9016
- (2) without information = 0,9 x height of blind (rounding to 100 mm)
- (3) without information = plastic ballchain colour according to plastic parts


(Information for taking measurements please see overleaf)

*side pull drive or electric drive
freely suspended
wall mounting*

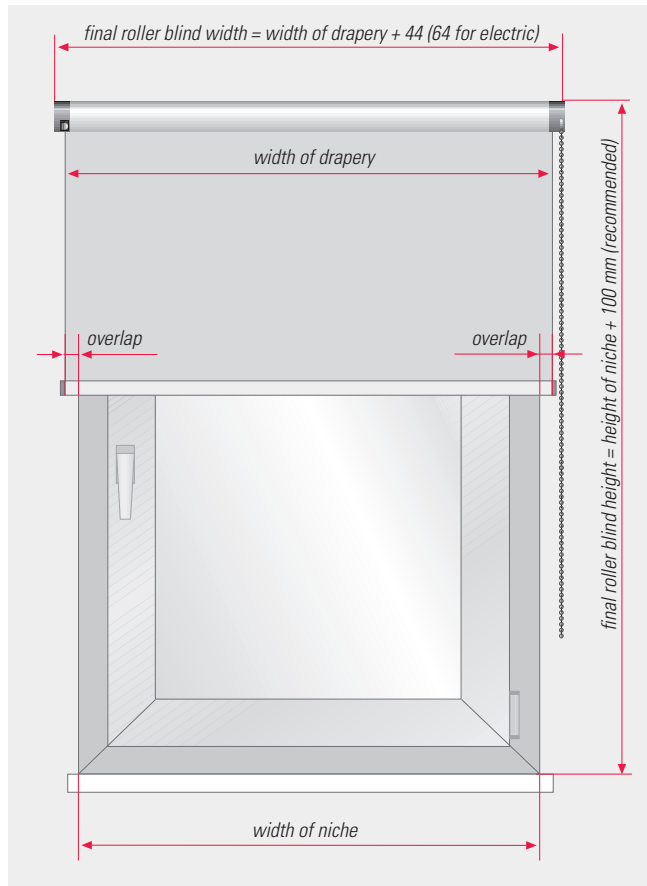


*Take width of niche precisely.
Consider overlap of drapery.
We recommend 50 mm at each side.*

*side pull drive or electric drive
with tension wire guiding
wall mounting*

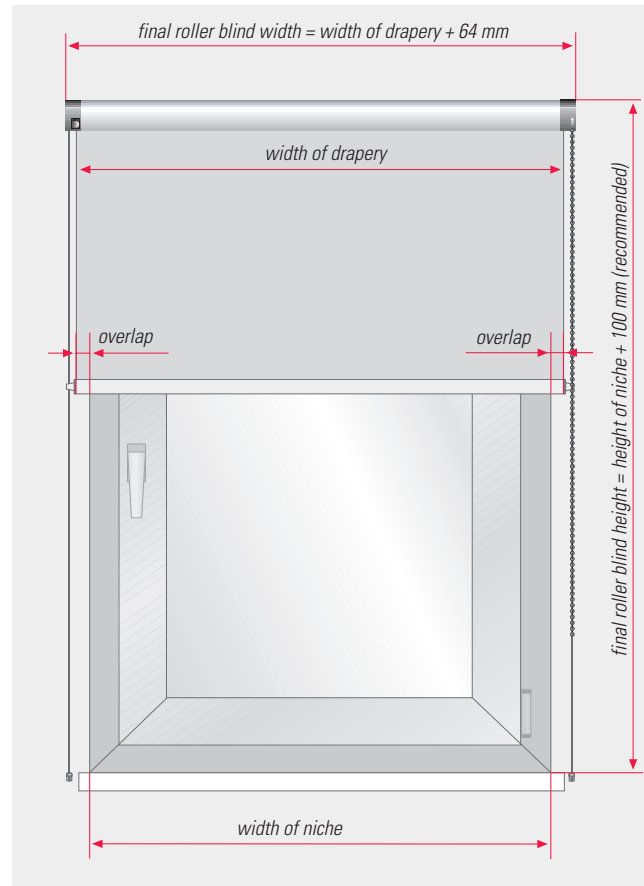

*Take width of niche precisely.
Consider overlap of drapery.
We recommend 50 mm at each side.*

*side pull drive or electric drive
with SunTape side guiding
wall mounting*

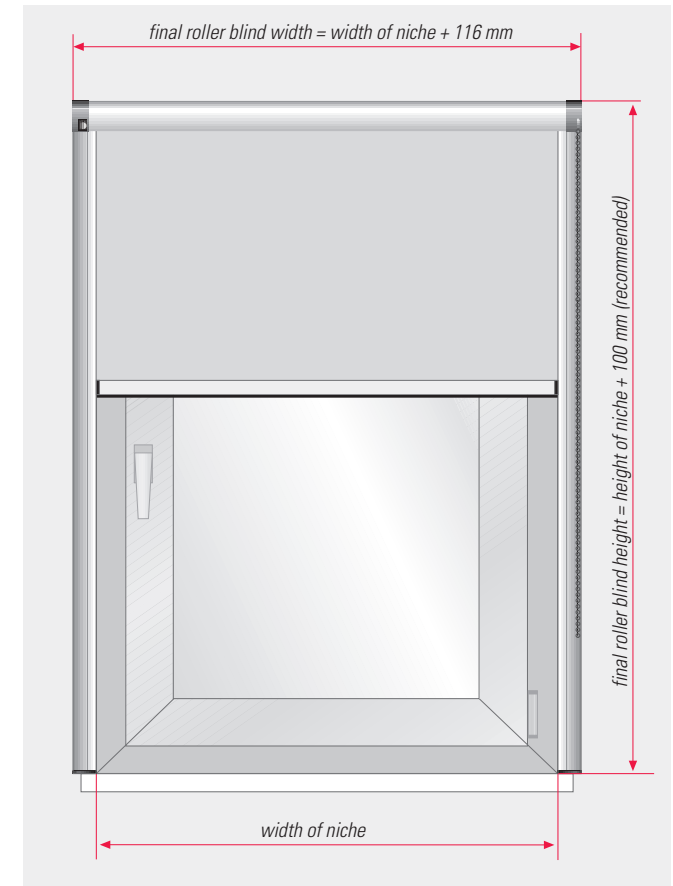

Take width of niche precisely.