



Wintergarden system 5066 ORDER FORM

CUSTOMER

Customer/Client-No. _____

Phone _____

Fax _____

Person in charge _____

Commission _____

RECEIVER'S ADDRESS

Messrs. _____

Address _____

Postal code _____ Area _____

for the attn. of _____

Delivery date _____

DISPATCH

UPS

Truck

Pick up

Others _____

OFFER-NO.

Please indicate, if an offer has been submitted: _____

Stamp _____

Date _____ Signature _____

ORDER

Attention: each sundrapé blind is made to measure and cannot be returned nor exchanged

pos.	customer pos.	pcs.	type no.	width	length	colour alu parts	telescopic rods distance (1)

repeat, please only mark, if you send this fax again due to failed message

quality no.	drapery	weight	1-Parted		operation				chain operating height	price
			Split	A	B	C	D			
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		

For further specifications of the blinds please use back side
 2 locking bolts per running meter are included in the delivery
 Recommended length of shading system: length - 30 mm
 All dimensions to be given in mm

accessories see price list

pcs.	art. no.

electric accessories see price list

pcs.	art. no.

(1) Please note:
 Telescopic rod distance without indication about 400 mm
 Special requests: indicate above


13 mm telescopic rods for systems up to 2500 mm
 16 mm telescopic rods for systems larger than 2500 mm

Type 5066


5866/67	Hand	1/2part
5666/67	45 W	1/2part
5166/67	30 WT	1/2part
5266/67	45 WT	1/2part
5566/67	65 WT	1/2part
5366/67	30 WDT	1/2part
5466/67	45 WDT	1/2part
5965/67	65 WDT	1/2part

Examples for measurements


① Angled blind

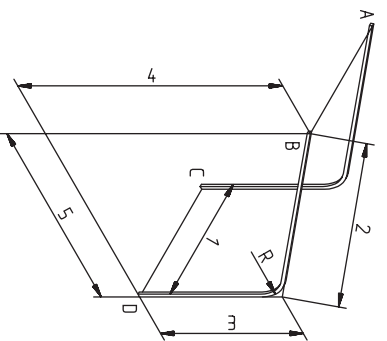

② Curved blind

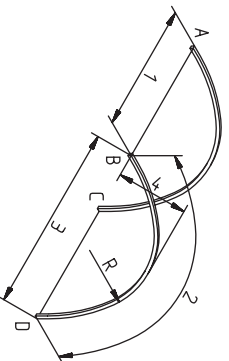

③ Ceiling blind



1 _____
 2 _____
 3 _____
 4 _____
 5 _____
 R _____

1 _____
 2 _____
 3 _____
 4 _____
 R _____

1 _____
 2 _____

Motor/Operation A 0
 B 0
 C 0
 D 0

Stack side A/B 0
 C/D 0

- The minimum curve radius is 350 mm
- Please add a drawing or pattern for different shapes
- Please always indicate the drive- and stack side